

Industrial Drying Tumbler



MDG120

LEGENDARY MAYTAG DEPENDABILITY - MAXIMIZING YOUR EQUIPMENT INVESTMENT FOR OVER A HALF CENTURY.

MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

KEEP YOUR OPERATION SAFE

The Sensor-Activated Fire Extinguisher (S.A.F.E.) automatically senses dryer fires, douses them with water and shuts off when the fire is out to minimize water damage. It's a breakthrough in commercial laundry safety that can even reduce your insurance costs!



FOR YOUR OPERATION

- 120-pound capacity dries more at once
- Auto cycle prevents overdrying
- Programmable anti-wrinkle feature
- Display counts down time remaining in cycle
- Extra-large door opening
- Extra-large lint compartment
- Easy-access design for convenient self-service
- Optional reverse tumbler feature reduces twisting
- Removable top section for easier installation

BUILT-TO-LAST FEATURES


- S.A.F.E. system puts out dryer fires
- Sealed bearings never need lubrication
- Heavy-duty motor
- Simple IMC intelligent controls with one-touch cycle selection
- **Unbeatable 5 year warranty - all parts covered**
- Available in natural gas, LPG or electric operation

Industrial Drying Tumbler



MDG120

DRYER SPECIFICATIONS	
CAPACITY	
Capacity — dry weight	54kg
Tumbler diameter	113cm
Tumbler depth	107cm
REVERSING TUMBLER	Yes
DRIVE MOTOR	
HP (blower)	3 HP (2.24kw)
AIRFLOW	
Cmm	50.71
GAS RATING	
BTU/hr. (kcal/hr.)	375.000 BTU/hr (96,498 kcal/hr)
Gas Inlet	1" F.B.S.P.T.
ELECTRICAL REQUIREMENTS	
	208-240V / 50Hz / 1PH
COLOUR	
White	Yes
APPROXIMATE WEIGHT	
Crated	680kg
Uncrated	660kg
DIMENSIONS	
A) Height	2207mm
B) Width	1235mm
C) Depth including door handle	1613mm
D) Floor to center of exhaust	241mm
E) Exhaust duct diameter	356mm
Door opening diameter	797mm

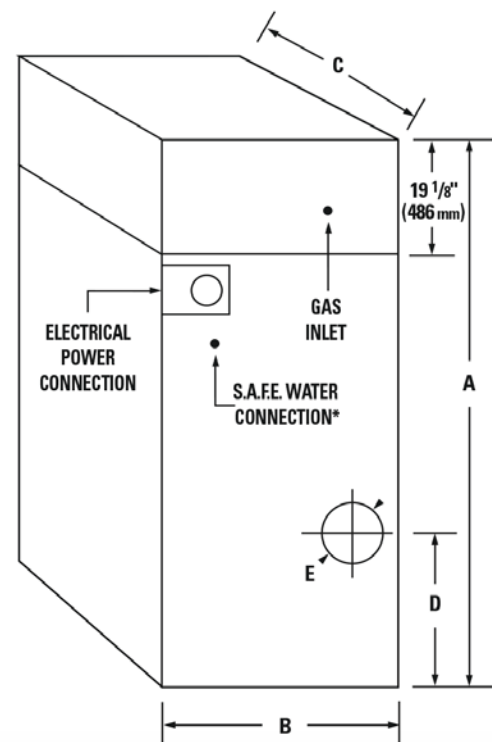

*S.A.F.E. water pressure requires 40 psi ± 20 psi.
Requires 1/2" (12.7 mm) water hose connection.

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.